

Positive Material Identification (PMI)



Thermo Scientific Niton XRF Analyzers



Positive material identification in seconds to ensure the safety of process manufacturing and power generation facilities



To verify the integrity of your process systems, take matters into your own hands.

For petroleum and petrochemical facilities, the emphasis on safety and accident prevention has never been greater – and with good reason: According to one study, nearly half of the 170 largest losses in the hydrocarbon process industry resulted from failures in the piping systems¹.

The requirement for positive material identification (PMI) in alloys used throughout the physical plant is more critical than ever. Simply relying on spot testing of parts and subassemblies is too risky and unacceptable; in fact, best practices today include 100% PMI testing of all critical materials.

While that may seem like a formidable challenge, it's now a surprisingly easy task thanks to technology that can literally fit in the palm of your hand.



Thermo Scientific Niton XRF analyzers: The tools your process safety engineers have waited for.

Thermo Scientific Niton XRF analyzers are the leading handheld analyzers available today for rapid and accurate positive material identification. Lightweight and ruggedly built for virtually any environment or weather condition, they deliver exceptionally accurate elemental analysis and alloy grade identification in seconds.

Thousands of companies in oil and gas refining, petrochemicals, pharmaceutical production, and power generation industries rely on our analyzers every day to ensure operational safety and maintain regulatory compliance. Lab-quality results are available almost instantly on the unit's bright, color, touch-screen display, allowing quick decision-making with total confidence. You can set user permissions on the analyzer, print certificates of analysis, and even remotely monitor and operate the unit hands-free from your PC.

- Rapidly verify alloys
- Recover lost material traceability
- Isolate finished welds to validate filler material and dilution
- Confirm the integrity of process piping, valves, and reaction vessels

Achieve all this and more with handheld XRF – the nondestructive testing method that leaves samples undamaged in any way.

¹Second International Symposium on the Mechanical Integrity of Process Piping, Houston, Texas; January 1996.

NITON XL

ALL MALL

Thermo

Thermo Scientific Niton XRF Analyzers

Thermo Scientific Niton handheld x-ray fluorescence (XRF) analyzers are revolutionizing elemental analysis with the simple pull of the trigger.

Rapid results, easy to use

Just point and shoot. See elemental analyses in seconds on a bright, color, touch-screen display.

Purpose-built

Ruggedized with sealed construction, our analyzers are built with tough LEXAN[®] plastic and weigh approximately three pounds (1.36 kg) each; dust- and waterproof for worry-free use virtually anywhere. One-step system check requires no external accessories while advanced batteries support up to 10 hours of continuous operation on a single charge.

Nondestructive analysis

Unlike destructive testing methods, samples remain intact and undamaged.

Application-optimized

High-performance x-ray system design with features matched specifically for PMI applications.

Flexible communications

Bluetooth[™] wireless and USB communications interfaces are included in every analyzer. Advanced Thermo Scientific Niton Data Transfer (NDT©) PC software lets you set user permissions, print certificates of analysis to document results, or operate the analyzer right from your PC. Niton XL3t FEATURE LEADER

Niton XL3t GOLDD+ ULTIMATE PERFORMANCE AND FEATURES

0.085 0.017

92 0.07

Niton XL2

Witten ALL

VALUE LEADER

Niton XL2 GOLDD

PERFORMANCE LEADER

Choose the Thermo Scientific Niton analyzer that meets your application needs:

A family of instruments that helps you comply with a variety of industry standards, such as API RP-578, API RP-571, and API RP-939-C

Niton XL2 Series	Niton XL2 GOLDD Series	Niton XL3t Series	Niton XL3t GOLDD+ Series
Value choice for incoming, in-stock, or in-service material verification – QA & QC	Niton XL2 rugged construction plus high performance and light element analysis (Mg-S) without helium purge or vacuum	Fully-featured, perfect for weld analysis and comprehensive component inspection	Highest performance and sensitivity for the most demanding applications
Ruggedized for harsh production environments	Rapid results for confident decision-making	Higher performance and sensitivity for challenging applications	Light element detection (Mg-S)
Standard analysis range of up to 25 elements	Angled color display with easy-to-read icons	Optional CamShot™ CCD camera for accurate sample positioning and image capture for traceability Optional WeldSpot™ small-spot focus feature	Integrated CamShot CCD camera is standard for accurate sample positioning and image capture; optional WeldSpot small-spot isolates welds
Ideal for asset recovery and trace- ability, providing rapid inspection anywhere data is needed		Upgradeable to Niton XL3t GOLDD+ Series	Detect and measure trace elements for FAC modeling (Cr, Cu, Mo)
Upgradeable to the Niton® XL2 GOLDD™ Series		Tilting, color, touch-screen display	Excels at analyzing components for residual elements in HF alkylation (API RP-571) and low Si sulfidation (API RP-939-C) systems

Petroleum/Petrochemical Production


With a unique library of 400+ alloy grades, Thermo Scientific Niton analyzers provide superior accuracy in grade identification that is unsurpassed by any other handheld XRF analyzer

Thermo Scientific Niton analyzers with GOLDD technology provide alloy chemistry for up to 30 of the most common elements in tens of thousands of alloy grades. Families of alloys that can be accurately identified and analyzed include:

- Stainless steels
- Cr-Mo steels including V stabilized versions
- Low alloy steel
- Tool steels
- Nickel alloys
- Copper alloys
- Titanium alloys
- Aluminum alloys
- Exotics, such as zirconium and tantalum alloys


Fast, accurate elemental analysis and positive identification ensure the integrity of your systems across the process plant:

- Rods and wire strands
- Finished welds and weld beads
- Bolts, rivets, and other fasteners
- Valves and flanges
- Complete reaction vessels



e1

Thermo Scientific WeldSpot feature isolates welds for analysis to verify proper dilution

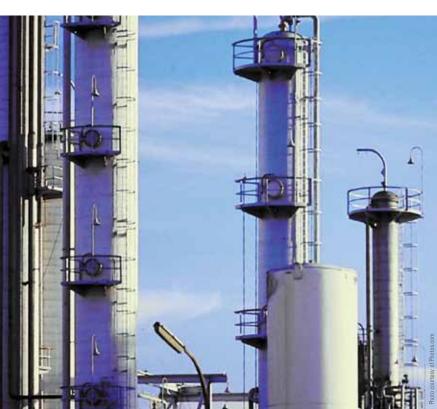

Assurance

Maximum performance and features

Thermo Scientific Geometrically Optimized Large Area Drift Detector (GOLDD) technology



Thermo Scientific GOLDD technology brings true lab-quality performance to handheld XRF analyzers. Delivering up to 10X faster measurement times than conventional technologies, it also provides the highest sensitivity and measurement accuracy, plus the capability of measuring light elements (magnesium, aluminum, silicon, phosphorus, and sulfur) without helium purge or vacuum.

Our advanced GOLDD technology allows you to accurately identify and analyze additional alloy grades, including:

- Zecor® SS alloys containing 5-6% silicon Titanium alloys, including direct measurement of aluminum content
- Aluminum and silicon bronzes
- Aluminum alloys for silicon and magnesium content

API Certification Courses

Take advantage of our experience.

In cooperation with Analytical Training Consultants (ATC), we have conducted numerous API-approved training classes, the latest featuring API RP-578 2nd edition, "Guidelines and Application Procedures for PMI, Material Verification using XRF and OES Technologies."*

*ATC is an API certified training provider (API reference TPCP-0118)



More than 25,000 Thermo Scientific Niton XRF analyzers are in use daily in more than 75 countries on six continents.


"The [Niton] XL3 provides quick results giving us a more efficient engineering process... we have also used it on general plant inspections...For practical purposes, it is far superior to using the services of an analytical laboratory."

Mark Taylor, senior engineer, Tetra Engineering, in

"Sophisticated Metals Analyser Helps Protect Power Station Pipes," Insight – Nondestructive Testing & Condition Monitoring, Vol. 51 No. 8 August 2009, p. 414.

"After working with the Thermo Scientific Niton XL3, we found that it gives us faster and what we feel are even more accurate results. This means quicker verification times. With the gain in speed, we can accept materials faster and get them into production faster, so we can also increase our percentage of testing – with the same amount of labor."

Brian Uhlenkamp, vice president of engineering, DCI, Inc.

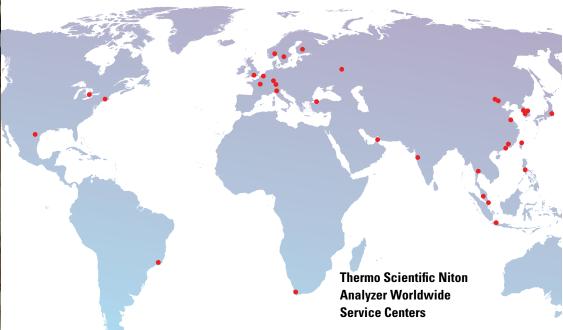

Superior XRF analysis solutions, backed by our worldwide sales and service

We are recognized as the leader in XRF analysis technology, serving companies in more than 75 countries on six continents. We serve our customers through corporate resources and a dedicated network of more than 70 distributors and 30 factory-trained service centers around the world to provide the most effective customer service possible. Our global reach and resources not only ensure worry-free product support, we also offer comprehensive services including application consulting and training anywhere you need them.





© 2010 Thermo Fisher Scientific Inc. All rights reserved. LEXAN is a registered trademark of GE Plastics. Bluetooth is a trademark of Bluetooth SIG, Inc. Zecor is a trademark of Mecs, Inc. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

XRF Analyzers

Billerica, MA +1 978-670-7460 niton@thermofisher.com

Americas

Europe, Middle East, Africa & South Asia Munich, Germany +49 89 3681 380 niton.eur@thermofisher.com Asia Pacific www.thermoscientific.com/niton

Central, Hong Kong +852 2869 6669 niton.asia@thermofisher.com

